




1.3.3 Approach to Network Architecture, Convergence, Interoperability, and Evolution [L.34.1.3.3]

The network infrastructure is evolving from multiple networks, systems, and processes into a unified service oriented architecture. Agencies benefit from architecture that includes both multiple protocol core routing and multiple service edge (MSE) transports built on top of solid optical transport foundation. This converged network architecture is based on industry-accepted standards and is designed for evolutionary changes such as IPv6 migration and next- generation internet protocol (IP)-based products like Voice over IP.



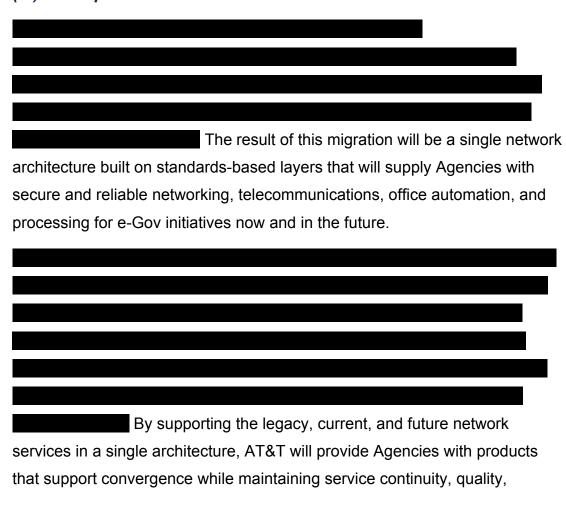



security, and interoperability.	

These network architectures and concepts along with their advantages are discussed in the sections as outlined in **Table 1.3.3-1**, which reflects the AT&T approach to network architecture, convergence, interoperability, and evolution.

	CONTENTS DESCRIPTION
Section	Discussion
Section 1.3.3.a: Integrated Access	 Describes the approach for providing integrated access to locations that support customer applications with different performance requirements. Provides a description of the AT&T access systems and methodologies that provide Agencies with reliable access through redundant networking. Discusses access to multiple services over a reliable network architecture.
Section 1.3.3.b: Overall Network Architecture	 Descriptions of the network transport and service layers References made to the edge technologies in Section 1.3.3.a Management systems and security initiatives that are built into the network are also discussed.
Section 1.3.3.c: Technology Evolution	 The methods used to ensure interoperability with future services. Support of existing interfaces and technologies as the network evolves to help support Agencies in their transition to future or emerging technologies.
Section 1.3.3.d: Introduction of technology	 Outlines the basic principles of engineering used to evolve the network Discusses how new services based on new technologies remain robust and secure. Describes the process that mitigates interoperability issues that typically surround the adoption of new technologies.
Section 1.3.3.e: Emerging Technologies	 Describes the AT&T applications aware networking (AAN) and SOA The use of traffic engineering and class of service routing to verify Agencies receive quality voice, video, and data services over the converged network.
Section 1.3.3.f: PSTN Interconnect	 Describes the method used for mapping telephone and telephone systems' IP- addressing to E.164 addressing that are used in the PSTN. Additional Public Switched Telephone Network (PSTN) interoperability, such as the use of gateways. Discusses how AT&T will migrate to the intercarrier ENUM model once it is ready for commercial use.
Section 1.3.3.g:	 Discusses approach to providing a migration to IPv6 from IPv4. Described how the network will carry Agencies IPv6 traffic as soon as they are ready to migrate. Lists tools and topologies that will help Agencies transition from IPv4 to IPv6 without having to completely rethink their networking strategy.

Table 1.3.3-1: Section Contents Description. This network architecture aids Agencies in mission accomplishment by providing products that support convergence while maintaining service continuity.

Using the network architecture, systems, and services that are described in the following sections, Agencies will be able to depend on AT&T to assist mission completion as needed in a reliable, efficient, and secure manner.





1.3.3.a Approach to Providing Integrated Access [L.34.1.3.3.a]

(a) Describe the approach for providing integrated access to locations that support customer applications with different performance requirements (e.g., voice, data, and video). [L.34.1.3.3.a]

AT&T's network evolution strategy is the consolidation of today's multiple data and IP networks to a single, global, MPLS-enabled backbone over an intelligent optical core network. Coupled with the MPLS core is an edge network architecture that combines resilient access networks with multiprotocol/multi-service capabilities. This edge network architecture consists of two major edge components; the Multi-service Access (MSA), and the MSE that provides coupling to the MPLS Core. Listed in **Table 1.3.3.a-1** are the functions of each of the network systems.

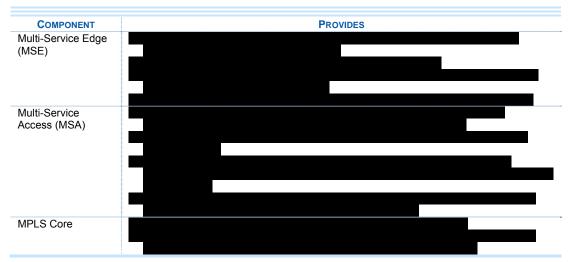


Table 1.3.3.a-1: Multiple Access Strategies over a Single Resilient Network. The use of the MSA and MSE offers Agencies the ability to connect multiple applications through single, managed underlying network architecture. This architecture interconnection to other Agencies also facilitates the adoption of new technologies.

The basic architecture for an MSA/MSE configuration is shown in







Figure 1.3.3.a-1: The MSE/MSA architecture provides resilient access to AT&T networks and services. Using the available underlying network layers, Agencies are provided resilient access to transport and services using multiple network protocols. This is an important step in the converged network strategy that supports both the new and the old network types in a single system.

1.3.3.a.1 **Multi-Service Access (MSA)** The MSA refers to the network through which customers connect to AT&T's network services. Key to this implementation is the support for protocol-independent virtual circuits through which the Agency accesses the multiprotocol transport core. This new network architecture provides Agencies increased service flexibility and service performance. Agencies will be able to evolve the service network types to match their ever-changing missions without completely re-engineering their network access.





1.3.3.a.2 Access Network Strategies
To facilitate Agency connectivity to the MSA/MSE systems, AT&T has built
and operates over 22,000 route miles of metro fiber configured with a
combination of SONET ring and mesh networks. Along with packet network
ransport, these rings support traditional TDM services such as T-1, T-3, and
SONET, as well as metro Ethernet over concatenated STS segments. The
access transport mechanisms between the MSA and the MSE are an internal
network to AT&T and managed as such. This strategy allows AT&T to offer
Agencies access interfaces that are managed at the network protocol level,
with the underlying access network supporting redundancy and availability.
Worldwide, where metro fiber networks are not owned, AT&T creates a
similar access level by leasing bandwidth from local exchange carriers (LEC)
and foreign Postal Telephone and Telegraph (PTT) entities at the lowest
possible network layer.
This allows AT&T to supply the upper layer communications product





to the Agency with QoS, network reliability, and network availability supported at the same level as that of AT&T-owned access networks.

1.3.3.a.3 Multi-Service Edge (MSE)

The MSE will terminate customer access into the global packet network and provide all the service specific features for Layer 2 (e.g., FR/ATM) as well as Layer 3 (IP) services, and Time Division Multiplexing (TDM)-based services.

Figure 1.3.3.a-2 depicts how the MSE acts as the termination point, QoS arbitration system, and on-ramp to the MPLS core network. Additional functions within the MSE are the control of access, security functions, and protocol conversion for services like VoIP.


Figure 1.3.3.a-2: The MSE Physical and Virtual Elements. The equipment handles the QoS and routing for IP, ATM and Frame Relay data within the MSE element. Additional edge functions that are included in a more virtual sense are the VoIP Border Edge and links to traditional 4E and 5E circuit switched voice.

The use of the MSA/MSE combination allows Agencies to operate multiple applications over the same access arrangement. Each applications data is treated with the proper QoS and data-handling mechanisms such as ToS bit packet marking and differentiated service packet routing, both of which are further discussed in Section 1.3.2.e.






1.3.3.a.4 Network Evolution

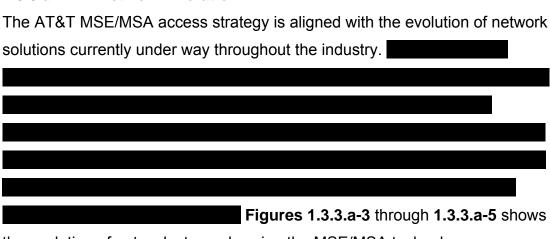

the evolution of networks towards using the MSE/MSA technology.

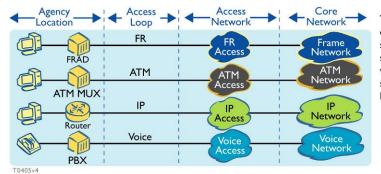

Traditional Networks- They are discrete in nature with access service and connectivity distinctly separated. Overhead bandwidth, which must be provisioned for each service, is managed separately by both the Agency and carrier.

Figure 1.3.3.a-3: Traditional Topology for Separate Service Types. In this topology, individual access pipes lead to different backbone networks. This evolved from differing network types embedded in the communications products along with the natural industry progression to packet-based multiplexing and bandwidth management.

Figure 1.3.3.a-4: The MSA/MSE Combination Used to Take Advantage of Access Network Bandwidth Reduction and Resiliency





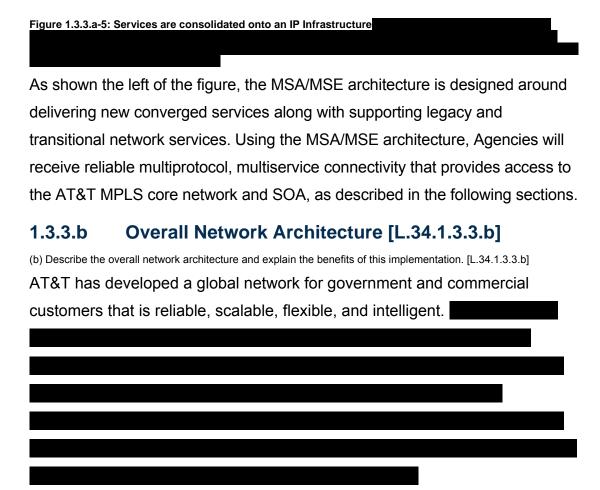


Figure 1.3.3.b-1 shows an exploded view of the converged networks architecture.





Figure 1.3.3.b-1: The AT&T Global network Architecture, is. Agencies benefit from carrying products over a core network that is fast, reliable, and error free. Based on standards and use of inter-working layers, the network's goal is to provide customers with every type of service possible from a single-access mechanism standpoint.





Table 1.3.3.b-1 provides a summary of AT&T's key architectural layers along with the scope, scale, and functionality of the physical, optical, and transport layers of the network

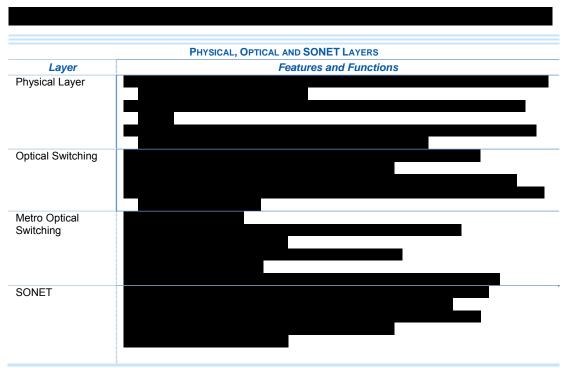


Table 1.3.3.b-1: The lower layers provide the footprint and the resiliency to the remaining network layers. Agencies with access to a variety of services from a single converged network architecture benefit by building on the physical layer with a standard set of optical and SONET systems.

1.3.3.b.1 Network Reach and Capacity

In

addition to the owned physical plant, AT&T leases or partners with LECs, PTTs and other carriers to further expand its reach where needed. No other company has the worldwide coverage that AT&T offers. This means Agencies can connect more services in more places using AT&T.

The capacity of the network is governed by the makeup and reach of the physical topology.





The importance of this capacity is to		
provide enough transmission capability for the world's growing need for		
bandwidth, being able to provide in-network spare capacity for reroute on		
failure, and to provide packet-based protocols with a congestion-free		
operating environment.		
1.3.3.b.2 Reliability		
To make the best use of the redundant fiber paths that are built into the		
physical layer, AT&T has invested in systems that take advantage of		
automated redundancy at the lowest possible layer and then repeat the use		
of redundant networking throughout the layers, including the service layers.		
1.3.3.b.2.1 Optical		
The AT&T fiber plant primarily consists of two distinct areas of operation. One		
is the long haul fiber, which serves to provide long distance transport both		
domestically and over seas. The other is the metro fiber, which supports		
campus network and intracity routes and ties POPs and interconnects		
together.		





Even with the multiple quantities per path, AT&T uses wave division multiplexing (WDM) to increase the capacity and resiliency of the fiber network. As shown in **Figure 1.3.3.b-2**, the WDM systems provide multiple optical interfaces available from a single fiber strand. In the AT&T WDM system several lambda are available for utilization by transmission equipment out of each equipment-facing WDM interface multiplex. This allows AT&T to interface multiple types of transmission equipment to a common WDM infrastructure which simplifies the operation of the Optical Electrical Optical (OEO) redundancy system that switches between redundant fiber routes.

Figure 1.3.3.b-2: WDM Provides More Bandwidth. Agencies benefit from a reduction in overall costs of bandwidth. Utilizing wave division multiplexing minimizes the amount of buried fiber needed to transport data and also reduces the number of costly long haul lasers.

(Figure 1.3.3.b-3)

Figure 1.3.3.b-3 The Optical-Electrical Optical Switch.






1.3.3.b.2.2 SONET	
	Figure
	1.3.3.b-4.
Figure 1.3.3.b-4: Protection for Data Circuits.	
Data Circuits.	
Figure	
1.3.3.b-5,	
Figure	1.3.3.b-5: with





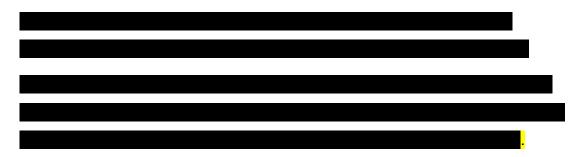

1.3.3.b.3 Circuit Switched Voice

The circuit switched voice network is the legacy voice network owned and operated by AT&T. **Table 1.3.3.b-2** outlines some of the features, capacities, and capabilities of the circuit switched voice network.

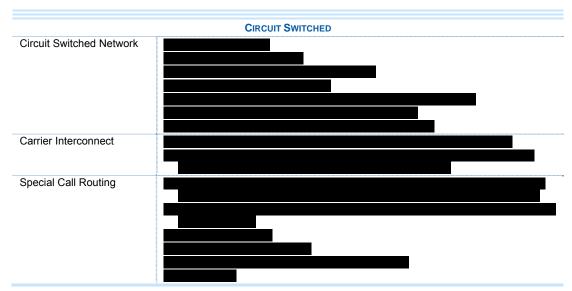


Table 1.3.3.b-2: Circuit-Switched Voice Network. The circuit-switched voice network includes both long-distance and local service switching and is fully integrated with the PSTN world wide.

1.3.3.b.3.1 Network Disaster Recovery (NDR) Teams

One key element in the overall reliability of the network is the AT&T's Network Disaster Recovery (NDR) service. Starting in 1992 for voice systems disaster recovery, the NDR has grown into the industry-leading network disaster recovery service with more than and a team of approximately specialized in the physical recovery of the AT&T's infrastructure. Support for the NDR service is built into the network and has grown from a voice






switch service into a NDR system.			

1.3.3.b.4 Upper Network Layers

Driven by IP-centric applications demand, IP-based services represent the fastest growing sectors of the AT&T network. Starting in 1999, AT&T began migrating its multiple networks to a single MPLS backbone/core network with multiprotocol, multiservice capabilities at the edge. AT&T is in the process of continuing integrating Frame Relay, ATM, and Ethernet networks into the MPLS backbone. In addition to the combination of network services, new IP-based services such as VoIP are being built into the upper layers of the network. **Table 1.3.3.b-3** lists the major features and capabilities of the upper network layers.

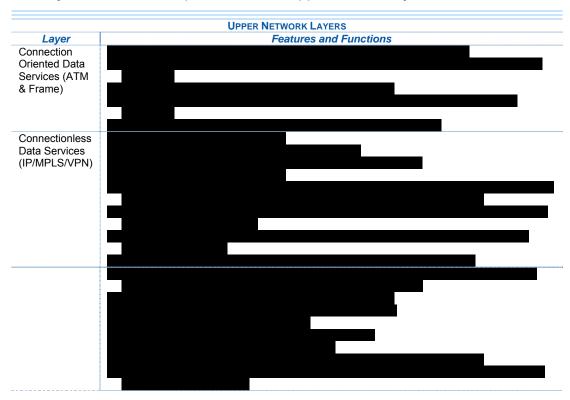





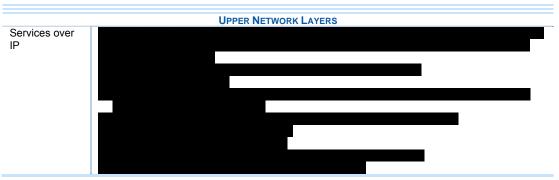


Table 1.3.3.b-3: Upper Layers Architecture for Performance and Service. Agencies can depend on these upper layers to support and provide the communications, computing, and collaboration systems that are emerging in the industry. With services migrating to be served over IP, AT&T's upper layers are poised to offer services over IP with security and efficiency in a modular format that allows the grouping of modules to create new service systems.

These upper layers are designed to support and provide emerging industry communications, computing, and collaboration systems in the industry without eliminating the services on which Agencies have depended. This network is designed to provide transition from existing services to future needs and applications through the addition of application-aware elements over the high-performance MPLS core.

1.3.3.b.4.1 MPLS

The core of all AT&T network based services is migrating towards a MPLS) network that uses Label Distribution Protocol (LDP) to establish switching paths. The MPLS network allows for the transport of both connection-oriented and connectionless packet data freely across the same infrastructure regardless of the underlying protocol.





SOLICITATION TQC-JTB-05-0001	e alal

TYPICAL OBSERVED MPLS CORE AT&T MPLS network METRIC **AVERAGES*** **TARGET** Month 1 Month 2 Month 3 spans the CONUS Round Trip Latency End-to-End Packet Loss worldwide Network Availability Packet Jitter AT&T footprint and provides Table 1.3.3.b-4: MPLS Routing in the Packet Network core. Once in the core, packet

Table 1.3.3.b-4: MPLS Routing in the Packet Network core. Once in the core, packet data is routed with a high level of performance and integrity. Agencies are able to move forward and focus on their mission instead of communication issues.

CONUS core routing performance characteristics as shown in

Table 1.3.3.b-4.

the typical

In addition to the forwarding performance, MPLS offers RFC-2547bis Virtual Private Networks (VPN) without creating end-to-end tunnels or permanent virtual circuits. These virtual networks, that provide any-to- any connectivity within the network, can be offered directly to customers or be used to create virtual service networks such as the one used for AT&T's Voice over IP (VoIP) products. The core

MPLS network also

features reliable

high performance

on-ramp through

the access edge.

Reliability between

the access edge

Figure 1.3.3.b-6: Redundant Links Provide Reliability. By utilizing the redundancy (dual links) built into the routing capabilities of the network, Agencies receive services that are reliable. As depicted In the model, a single failure does not affect the service since the entire route path shown can be followed to pass data.

and core networks is provided using the access architecture shown in **Figure 1.3.3.b-6**.

1.3.3.b.4.2 Services over IP

In the uppermost layers of the architecture are found the services over IP. The architecture is designed to support users of the services that generally require





only a personal computer (PC) or an IP phone and a connection to the network. Service creation, the combining of different service components to create a new single service, is handled by the service creation layer in the network.

Table 1.3.3.b-5 describes the service offerings architected into the network.

ELEMENT	Service or Function
	VoIP
Call Routing	Call routing and PSTN access are built into the network
IP Centrex	PBX-like services are built into the VoIP network
Messaging	A choice of messaging
Ad Hoc Collaboration (data, voice, video)	Systems that support collaboration services
	Network Hosting
Network Servers	Managed and unmanaged server space to house and process database, back office applications, and other business processes.
Content delivery	Web, streaming media, caching, and other content served to internet and intranet users.
Intelligent DNS	A domain name service (DNS) service that tracks network and systems performance then routes users to the most available content resource
Storage	Network-accessible storage media via IP or storage area network (SAN) to augment Agency storage needs. Storage can be selected as an addition to other SoIP products
Utility Computing	Network- based computing for nearly any task or business process. Can be used to process common database elements and other functions that are shared among business entities.
Computing on demand	Computing and content delivery systems geared to handle seasonal and one time events.
Backup Services	Storage media, backup routines, vaulting, and data restoration services for both routing and critical data.

Table 1.3.3.b-5: Modular Service Nodes Adapt to Changing Agency Needs. Using service modules that are architected into the network as individual elements and the surrounding network systems functions, along with open standards protocol access, special functions supporting Agencies ever-changing missions can be constructed on the fly.

SoIP service modules follow distributed and modular construction and are accessible using open protocol standards. This construction and standard access allows for combining of elements to create new products.





1.3.3.b.4.3 Interconnects With Extranets

The various distinct layers of the network, all operating as a single unit, provide a system that interconnects well with other carriers networks when needed

The variety of network interconnects is shown in **Table 1.3.3.b-6**.

N ETWORK	INTERCONNECT
IP Peering	Uses BGP and SONET at the POPs to interconnect to private peering points world wide
SS7	AT&T operates an extensive SS7 network that is an integral part of the world's call switching fabric. This network is also has gateways to VoIP.
PSTN interconnect	POP locations at every major carrier interconnect point in the U.S. as well as several international interconnects
Carrier Transport	Access and transport interfaces at sub-rate levels through OC-48 to every major carrier.
ATM/Frame to IP/MPLS	
Cell Networks	AT&T carries data and voice for and is interconnected directly to the major cell networks
Cable/DSL	AT&T has interconnect and partnership agreements with cable and DSL broadband providers.
Satellite Networks	Linkage to major satellite carrier networks as well as several owned and operated earth stations.
Wireless Networking	

Table 1.3.3.b-6: Inter-working Networks. By utilizing the layered architecture with a multiple service edge, Agencies are seamlessly interconnected to many types of networks that support a variety of services and missions. These networks include legacy networks, the Internet, and networks that are created by new technology (e.g., wireless access).

Using an architecture that interconnects easily and natively supports multiple protocols and topologies, AT&T provides Agencies with all types of connectivity and service with its own and partner facilities as well as those of interconnected networks and systems.

1.3.3.b.5 Management and Security Architecture

Even the very best service delivery network architecture cannot function without solid systems management and provisioning. In addition, the vast





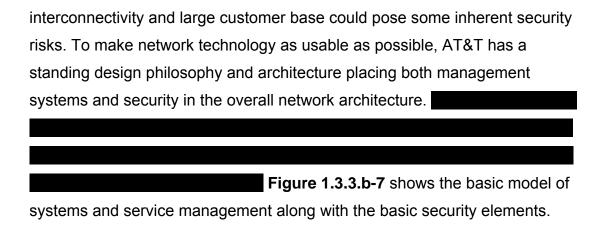


Figure 1.3.3.b-7: Built-in Management and Security.. Both security and management are process oriented, with network layers requiring different processes. The layers of the management and security systems abstract the differences, allowing for a more seamless and secure operation. This network architecture layers the management and security systems on top of the management network.

Using the management systems architecture, AT&T combines the functions of provisioning, network monitoring, and service management using the three basic functions found in the element management systems (EMS), various network operations center (NOC), and unique product operations center (PNOC) systems. By using these distinct areas of operations AT&T initiates and combines services into new products quickly without upsetting the security that is designed into both the service and the management networks.





Table 1.3.3.b-7 lists the basic architectural elements and functions of the management and security systems. (Note that the management systems architecture is both physical and logical.) The security architecture shown and discussed here is the logical extension of the overall security architecture.

FUNCTION	FUNCTIONAL ELEMENTS
Operations/ Management	 The management systems are architected in a modular fashion to match the modular construction of the service network. All network systems and elements are managed from a dedicated secure management network. EMS help abstract management data into a commonly collected set of parameters EMS provide provisioning language interface to differing systems Service provisioning uses several EMS elements to create a service form multiple network modules. Network Operations receive operational data through EMS elements and correlate the data for a big picture view of the network. Product operations provide a service level view that is a collection of data form many EMS and NOC elements. Data collection and history storage allows customers to view product-based data and helps self-management of the services. The service-creation layer uses the service provisioning from product operations along with the web portal to allow for ad hoc provisioning of new services created from modular service elements.
Security	 Separation – Networks are separated into trusted and untrusted domains. Automation – Security processes are fully automated and can process data at full network loads Monitoring – Each layer and element is monitored for both normal and under attack scenarios allowing for security management overall as well as system by system. Control – Access to systems and networks is controlled Design and testing – Lab testing of risks and mitigations leads to secure network design Response – Response teams act immediately when monitoring reports an event Innovation and architecture – AT&T's approach to innovation in its architecture and design aims is to keep the network ahead of both intentional and accidental security threats.

Table 1.3.3.b-7: Management and Security Systems Work Together. Agencies receive secure, reliable, and innovative products by utilizing the layered management architecture along with security systems that are designed and built into the network.

By designing management and security into the network architecture, AT&T avoids outages and service function failures in both new and existing services. In addition, the modular deployment of management and security systems are designed to easily scale with the service elements and systems that create the services.





1.3.3.b.5.1 Operations Administration Management and Provisioning (OAM&P)

The layers management architecture allows AT&T to offer a holistic management, operations, administration, provisioning, and monitoring approach to customer applications and required customer networking.

Datacenter resources to support these applications are accessed through a system that provides a single point of control through system integration.

The existing operations, administration, management and provisioning (OAM&P) systems, applications, and processes support very large-scale infrastructure, network, and managed services.

However, in order to support the unprecedented scope of Government IT and telecommunications requirements in Networx, AT&T is making a major investment in additional capabilities and functionalities for OAM&P systems.

1.3.3.b.5.2 Security Built Into the Network

AT&T network is evolving into a comprehensive security network that integrates the end-to-end physical, systems, and information security protection for each service, network and OAM&P element or component. This security network incorporates customer premise, network premise, data center, network access, and network-based security. Based on sophisticated security structures, processes, and unique security expertise, AT&T network security approach is proactive, detects attacks very early, and offers comprehensive security protection. Please see Section 1.3.1 for a complete discussion on security and security systems.





1.3.3.b.6 Standards-based Networking

The overall AT&T architecture is based on common standards from standards organizations such as IEEE, International Internet Engineering Task Force (IETF) and ITU-T. Adherence to standards allows for better interoperation with customers and extranets, network layers, and service nodes. In addition to interoperability, standards adherence allows AT&T to take advantage of the sum total of the telecommunications industry experience.

AT&T also plays an active role in the standards bodies, lending its many years of experience in networking and providing reliable high-capacity services to the process of standards development.

1.3.3.b.7 Technological Evolution The overall AT&T core and edge network architecture is built to support evolutions in technology and service in two basic ways.

With this

architecture, new customer-facing features and functionality can be added more quickly at the edge using the service agnostic core. This strategy is described in more detail in Section 1.3.3.d of this document.






1.3.3.c Network Evolution, Convergence, and Interoperability [L.34.1.3.3.c]

(c) Describe how the network architecture supports technological evolution, convergence, and ensures interoperability with present and future commercial networks. [L.34.1.3.3.c]

AT&T currently uses two basic methods to support technological evolution in two basic	The current network architecture supports the addition of new technologies without impacting
ways.	
Using the	nese two methods allows
Agencies with investments in technologies to co	ontinue to utilize that
investment while taking advantage of newer ted	chnology.
Table 1.3.3.c-1 outlines the ba	asic elements and some of the
current areas of effort in the AT&T network evo	lution.





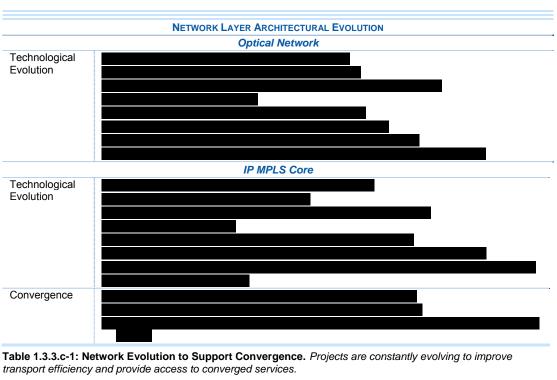

transport efficiency and provide access to converged services.


In addition to the effort to improve the network core, AT&T is also adding layers of functionality to the network using SOA and AAN. Table 1.3.3.c-2 outlines the basic

elements of the service layers architecture, including convergence and interoperability points.

SERVICE LAYER ARCHITECTURAL EVOLUTION Services Over IP Technological Evolution





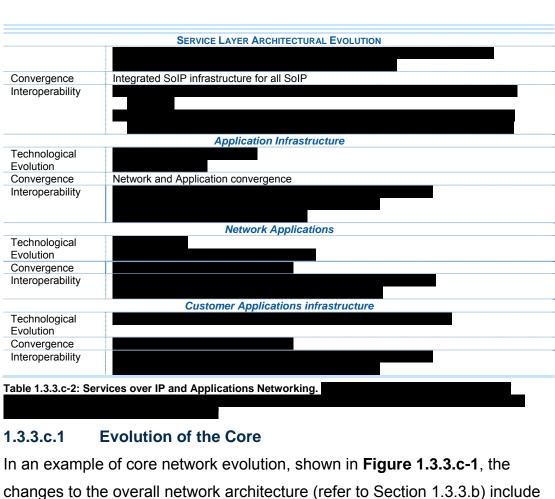

changes to the overall network architecture (refer to Section 1.3.3.b) include

	_
	1
	•

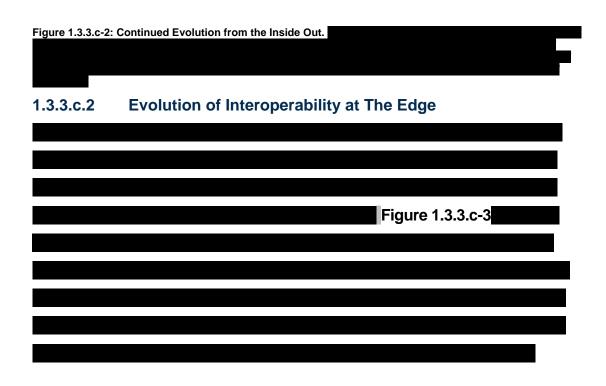




Figure 1.3.3.c-1: Next Generation Networks.	
Figure 1.3.3.c-2,	












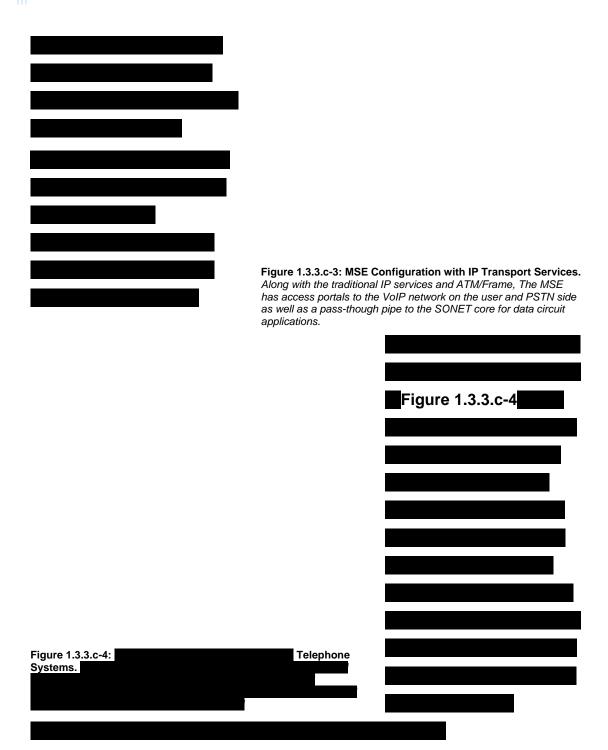

As shown in the previous two diagrams, the MSE is made up of both physical systems located in the same POP location or those that are connected by a





1.3.3.c.3 Access Mobility
In order to converge the networks and interoperate with both emerging and
existing network topologies, the AT&T network architecture includes
(Figure 1.3.3.c-5).

